

Maintenance Instructions ClimaRad Sensa Horizontal 2015

Maintenance frequency for filters

When should you replace the filters?


- With normal use, every 2 years or earlier if the message 'Filter vervuild' appears on the display (for example in homes and offices).
- In the case of intensive use, after 1 year or earlier if the message 'Filter vervuild' appears on the display (e.g. for care homes and schools).

Ordering filters


Order new filters at

www.climarad.nl/filters


Maintenance ClimaRad Sensa Horizontal: replacing the air supply filters

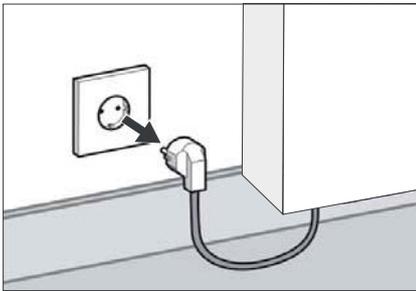


1. Switch off the device first by removing the plug from the socket.

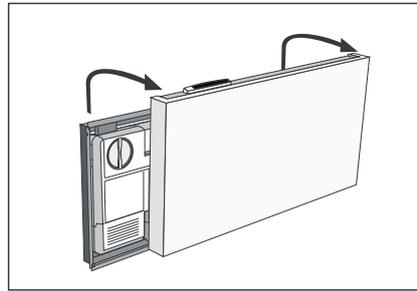


2. Remove the cover of the Sensa by lifting it upwards.

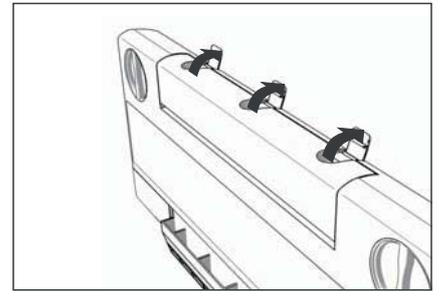


3. Open the three clips on the top and tilt the filter housing forwards.

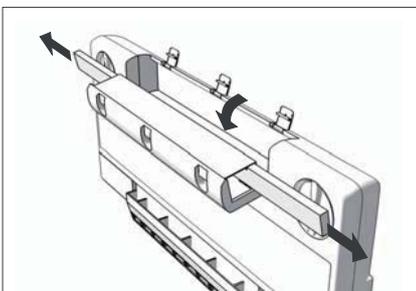


4. Slide the two contaminated filters to the sides out of the filter housing.

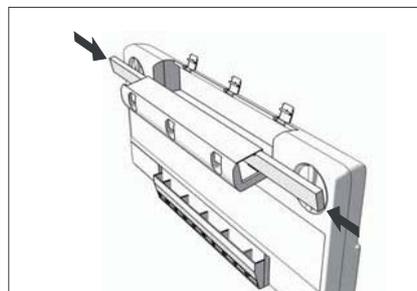


5. Slide the two new filters fully into the filter housing so that they do not project.

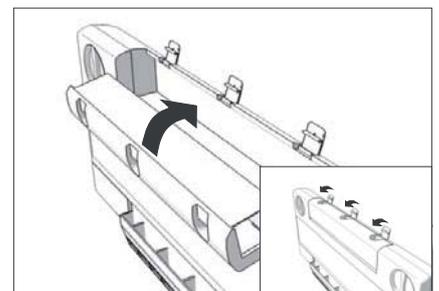

6. Tilt the filter housing upwards and secure with the three clips.

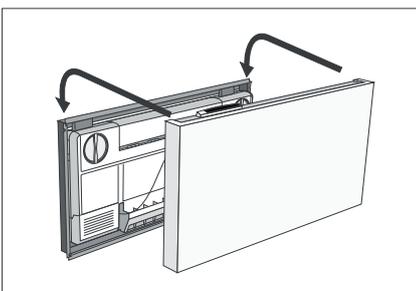

7. Put the cover back on the ClimaRad Sensa V2X.

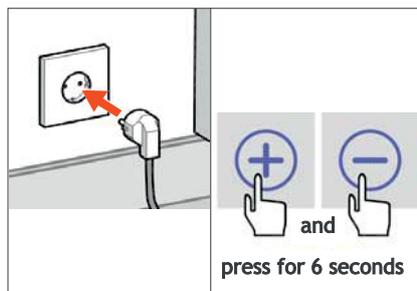


8. Push the plug back into the socket and reset the filter hour counter by simultaneously pressing on the + and - on the display for 6 seconds. The message 'Filter vervuild' will disappear.


Important: Reset the filter hour counter only if you have replaced the filters.

Caution: Make sure the filters do not protrude from the filter housing or that tools are trapped between the filter housing and the radiator housing. This can damage the filter housing and cause air leaks along the edges.


Cleaning the filter tray

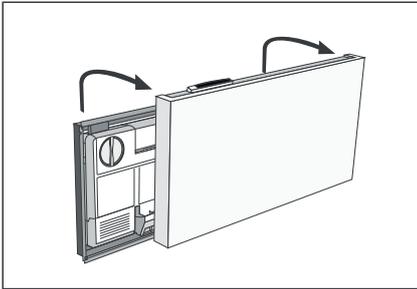

1. Remove the cover of the Sensa by lifting it upwards.

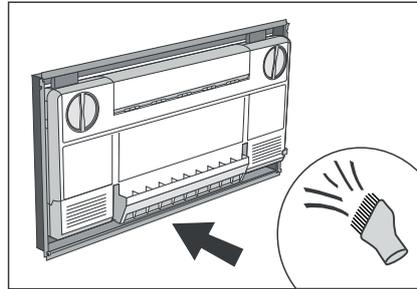


2. Use a vacuum cleaner to remove as much dirt as possible from the filter tray at the bottom.

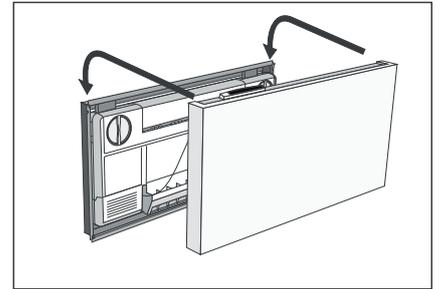


3. Put the cover back on.


replacing the air outlet filters

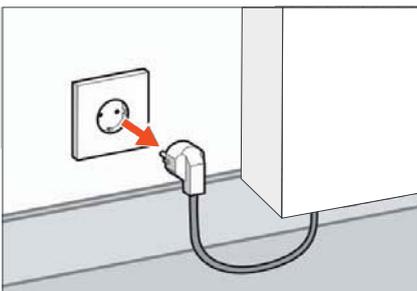


1. Switch off the device first by removing the plug from the socket.

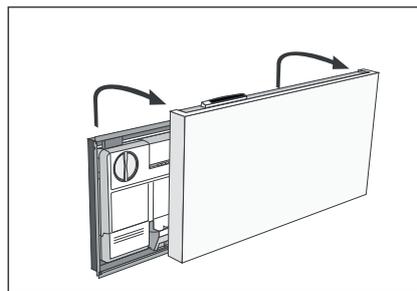


2. Remove the cover of the Sensa by lifting it upwards.

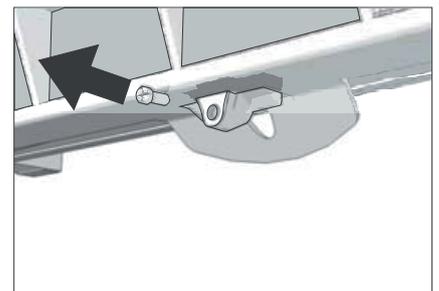


3. Loosen the two screws under the filter cover.

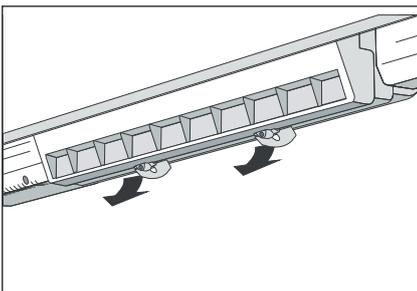


4. Pull the two clips gently towards you. Turn the filter grille as far as forward as possible.

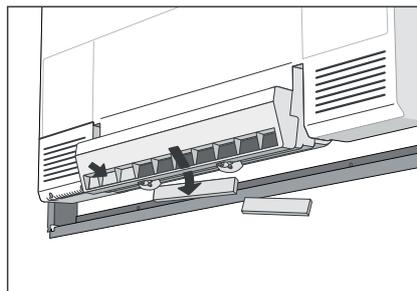


5. Push the three filters backwards so that they can come loose.

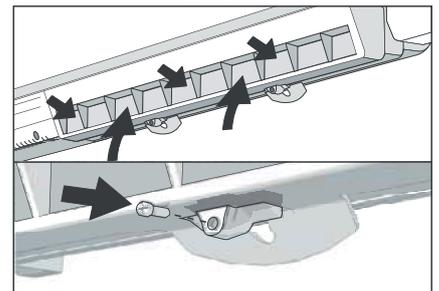

6. Push the three new filters in the sections and press the grille at the bottom with the two clips firmly closed until you feel it snap.
Screw the grille in position with the two screws.

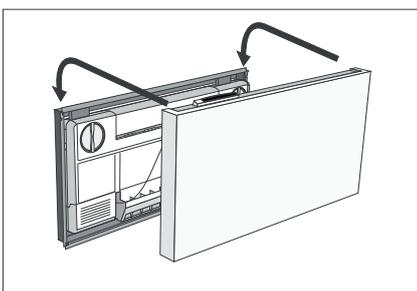


7. Put the cover back on.

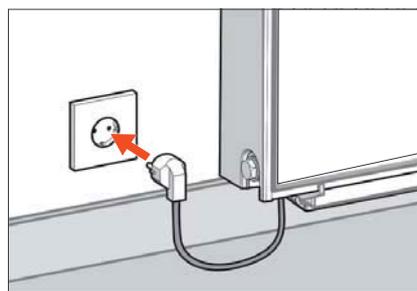


8. Push the plug back into the socket.

Please note that the grid must be properly closed for proper operation.


Cleaning the airducts

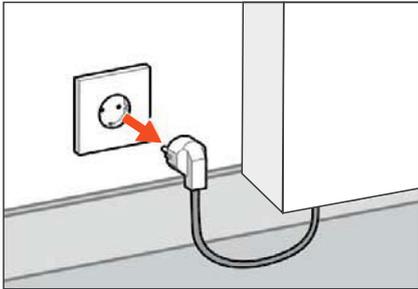


1. Switch off the device first by removing the plug from the socket.

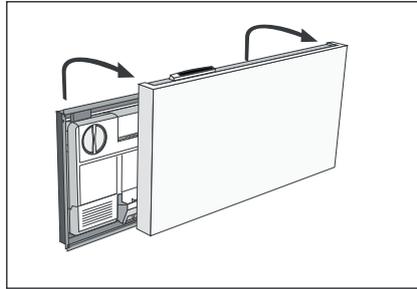


2. Remove the cover of the Sensa by lifting it upwards.

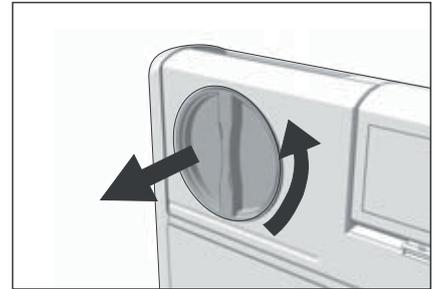


3. Remove the two caps by turning them to the left and removing them.

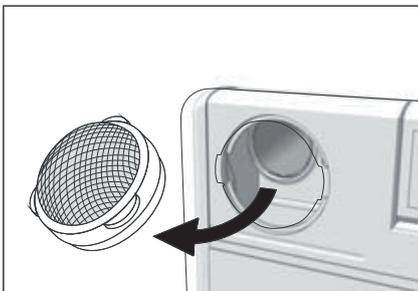


4. Grasp the round caps at the three tabs and remove both.

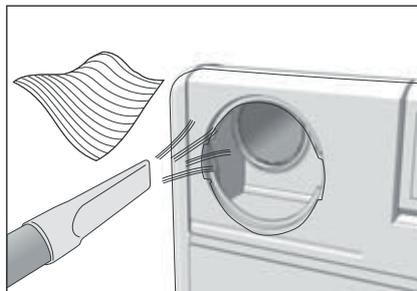


5. Remove any dirt from both channels with a vacuum cleaner or a soft cloth (do not use water).

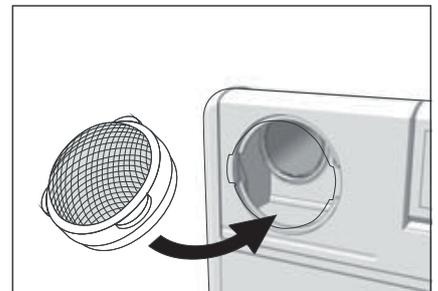


6. Insert the round caps.

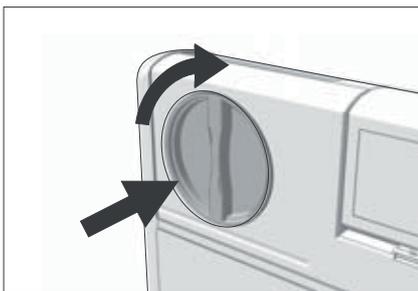

7. Install both caps and tighten them well for a correct operation.

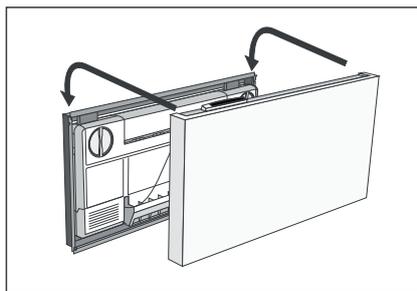

8. Put the cover back on.

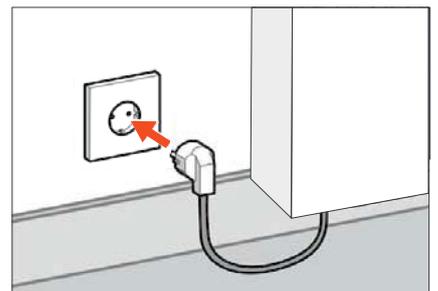

9. Push the plug back into the socket.